


Rock

Preliminary specification according to EN 1307



Type of manufacture	ISO 2424	Tufted 1/10 "						
Aspect	ISO 2424	Loop pile						
Dye method	Solution dyed							
Dimension	EN ISO 24342	cm x cm	50 x 50 / 19,68" x 19,68" (20 tiles per box)					
Primary backing	ISO 2424	Polyester fleece						
Secondary backing	ISO 2424	DESSO ProBase Polyver® - Polyscan®						
Pile fibre composition	ISO 2424	BCF Polyamide 6 and ECONYL® (ECONYL® is made from 100% regenerated content) **						
Total thickness	ISO 1765	mm	7.0	inch	0.3			
Effective pile thickness	ISO 1766	mm	3.6	inch	0.14			
Total mass	ISO 8543	g/m ²	4200	oz/yd ²	124.0			
Total pile mass	ISO 2424	g/m ²	685	oz/yd ²	20.2			
Effective pile mass	ISO 8543	g/m ²	420	oz/yd ²	12.4			
Pile density	ISO 8543	g/cm ³	0.117	lb/in ³	0.0042			
Number of tufts	ISO 1763	/dm ²	950	/yd ²	79430			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	≤ 1 x 10 ⁹					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307	33 Commercial - heavy use						
Luxury rating	EN 1307	LC 2						
Dimensional stability	EN 986	%	≤ 0,2					
Impact sound reduction ΔL _w	ISO 10140	dB	25					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	0.01	0.03	0.08	0.19	0.34	0.42
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m ² .K/W	0.076					
Flammability	EN 13501-1	Bfl - s1 (loose laid tested)						
Prodis - GUT	www.pro-dis.info	5CDD560E						





EN 14041
0493-CPR-0002


Manufactured by:


Tarkett BV
Taxandriaweg 15
NL - 5142 PA Waalwijk



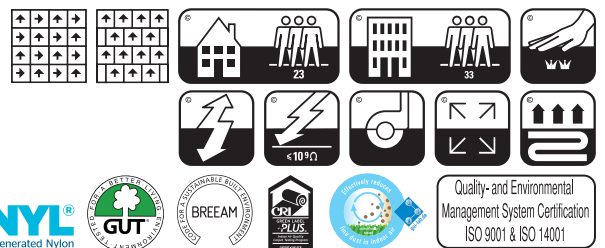














































** ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: professionals.tarkett.com

Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, visit professionals.tarkett.com

EN-20180510

Tarkett BV
Taxandriaweg 15
NL-5142 PA Waalwijk

